

TX-5266W300FC120-NUFENW-C01H95

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 10A.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaN

Emitting Color:


- ◆Warm White

Applications:

- ◆Auxiliary lighting
- ◆Architectural lighting

Part No.	TX-5266W300FC120-NUFENW-C01H95	Spec No.	WKF-BE0911	Page	1 of 7
----------	--------------------------------	----------	------------	------	--------

Package Dimensions:

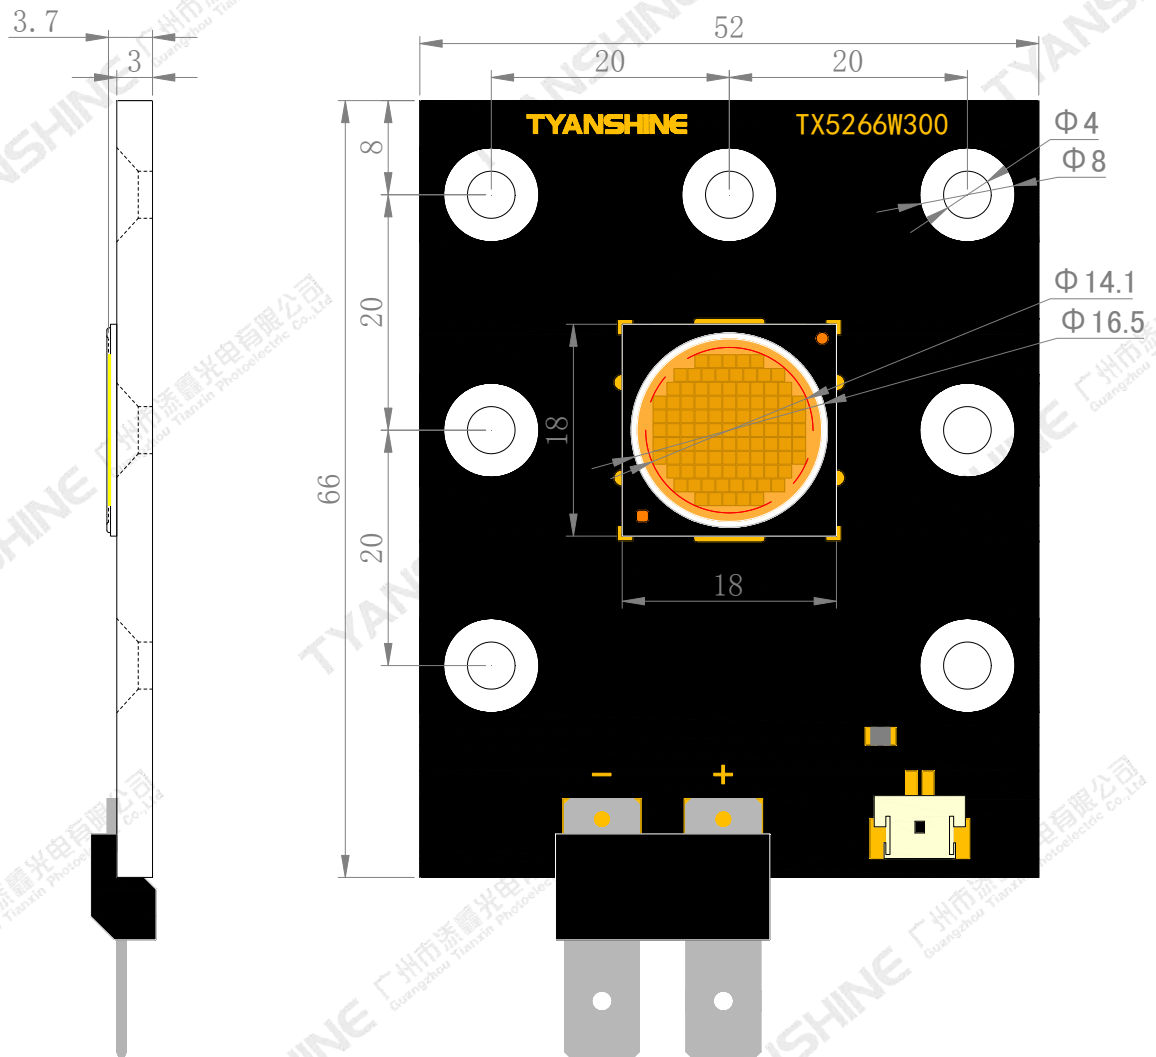

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are ± 0.1 mm .

Absolute Maximum Ratings (Tc=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	IF	10	A
Reverse Voltage	VR	Not designed for reverse operation	V
Power Dissipation	PD	345	W
Junction Temperature	Tj	150	°C
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	Tstg	-20~+70	°C
Operation Temperature	Topr	-30~+100	

Notes:

1.Specifications are subject to change without notice.

2.The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.

3.Precautions for ESD:

STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics

Parameter	Symbol	Condition	Emitting Color	Min.	Typ.	Max.	Units
Luminous Flux	Φ_v	If=9A (Tc=25℃)	W	14200	15700	17200	lm
		If=9A (Tc=85℃)	W	11650	12900	14150	
Correlated Colour Temperature	CCT	If=9A (Tc=25℃)	W	2950	—	3220	K
		If=9A (Tc=85℃)	W	2955	—	3250	
Forward Voltage	V_f	If=9A (Tc=25℃)	W	32	34	36	V
		If=9A (Tc=85℃)	W	31	33	35	
Viewing Angle at 50% IV	$2\theta_{1/2}$	—	—	—	120	—	Deg
Spectral Line Half-Width	$\Delta\lambda$	If=9A (Tc=25℃)	W	175	180	185	nm
		If=9A (Tc=85℃)	W	170	175	180	
Reverse Current	I_R	—	—	—	—	—	μA
Color Rendering Index	Ra	—	—	95	97	—	—
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	—	0.045	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$	If=9A	—	—	-16.3	—	mV/℃
Thermistor(NTC)	Rt25	—	—	—	10	—	K Ω


Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±0.15V.


Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)


Forward Current VS. Relative Forward Voltage

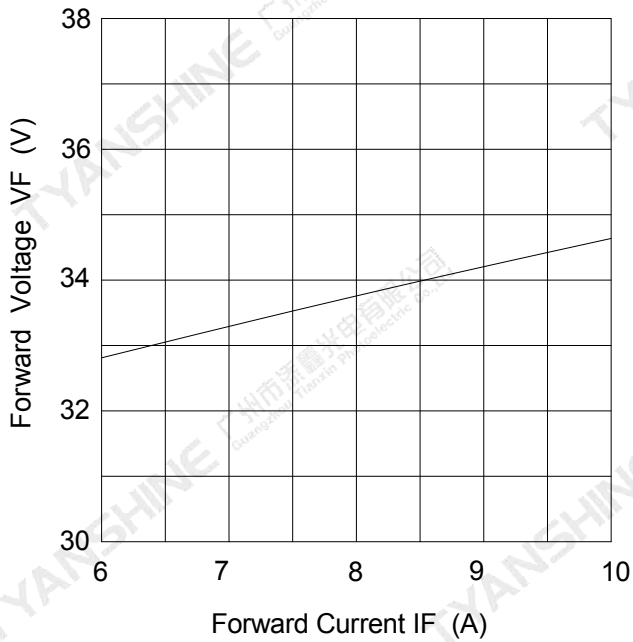


Forward Current VS. Relative Luminous Flux



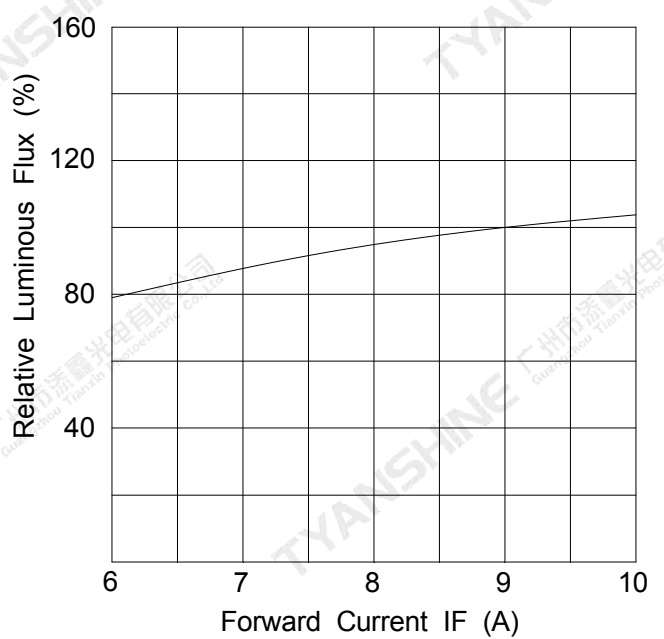


Temperature VS. Relative Luminous FLux (IF=9A)

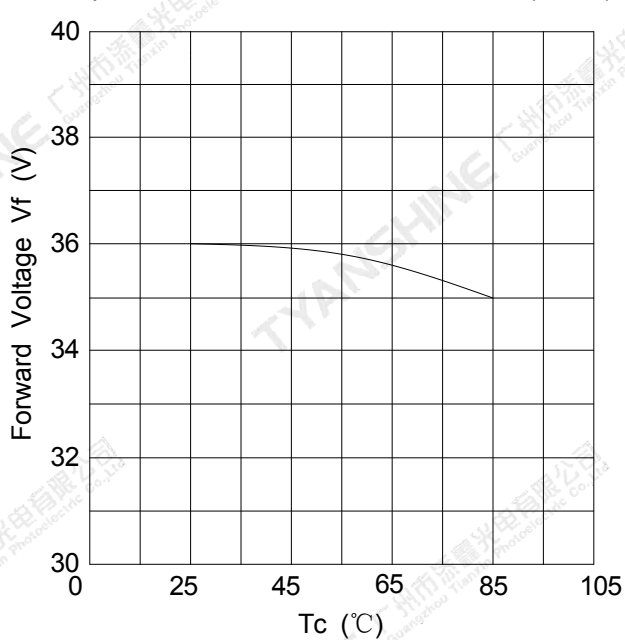

Temperature VS. Forward Voltage (IF=9A)

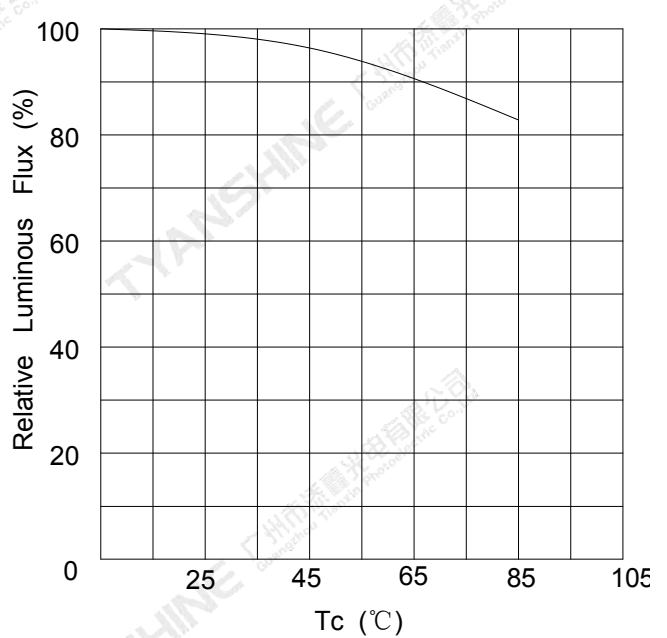

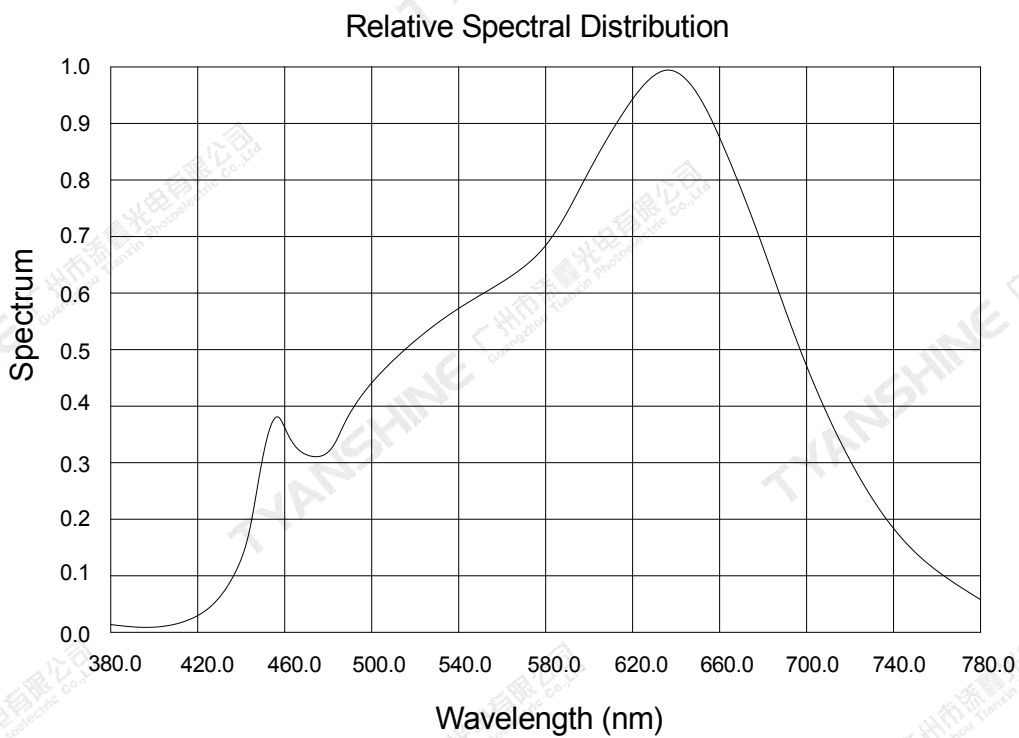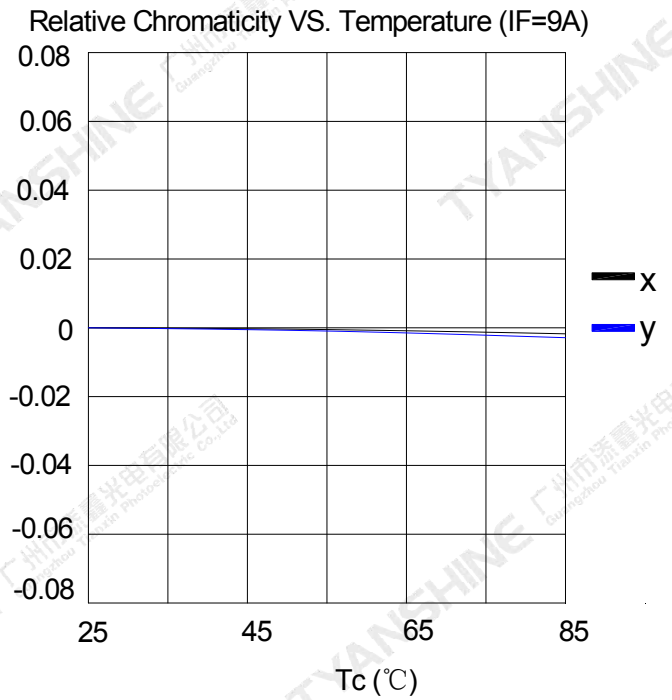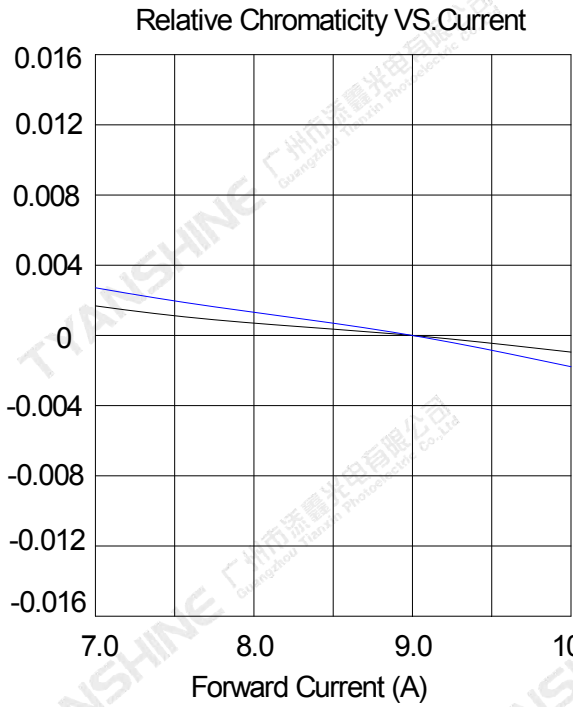


Notes:

1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Part No.	TX-5266W300FC120-NUFENW-C01H95	Spec No.	WKF-BE0911	Page	6 of 7
----------	--------------------------------	----------	------------	------	--------

Dimensions For Cannulation And Packaging

Quantity:2 PCS

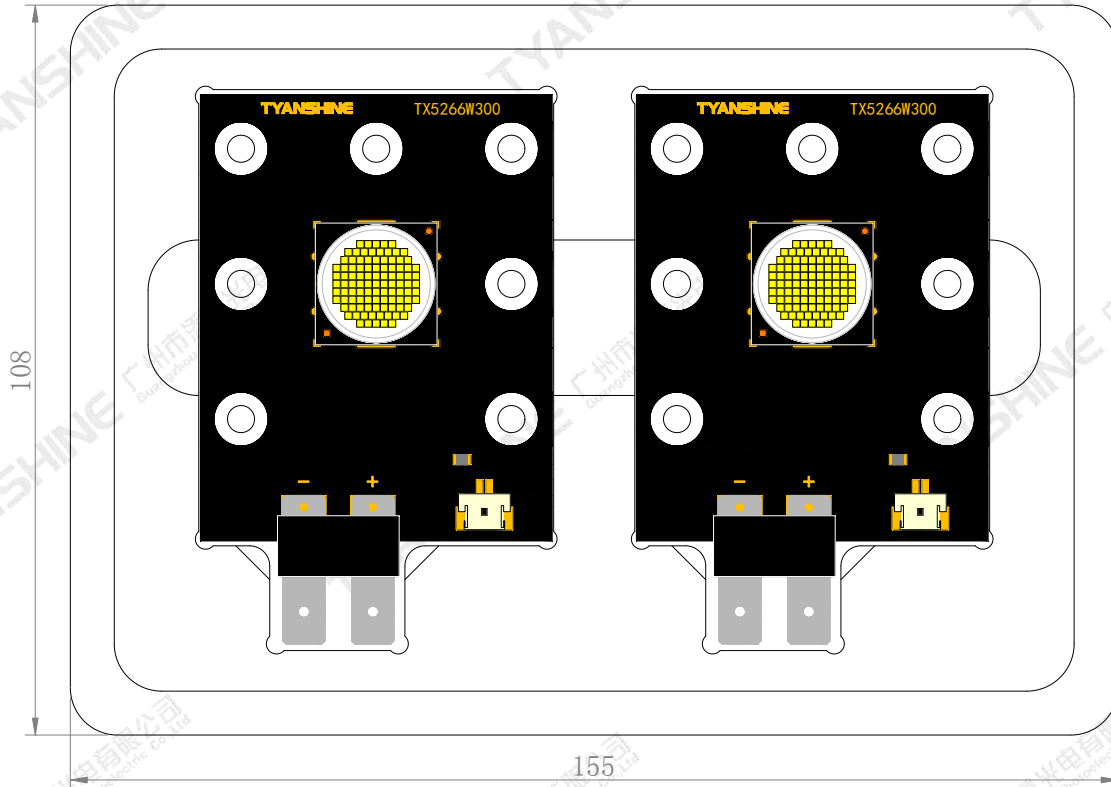

Notes:

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-5266W300FC120-NUFENW-C01H95	Spec No.	WKF-BE0911	Page	7 of 7
----------	--------------------------------	----------	------------	------	--------