

TX-5260RGBW200C26V-01

PRODUCT SPECIFICATION

Features:

- ◆ Excellent transiting heat from LED chip operating under 1.7 A.
- ◆ Mixing any two colors of light, there will be no partial color and color spots uneven phenomenon.
- ◆ High luminous output.
- ◆ No UV.
- ◆ Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆ Red: AlGaInP
- ◆ Green: GaInN
- ◆ Blue: GaN
- ◆ White: GaN

Emitting Color:


- ◆ Red
- ◆ Green
- ◆ Blue
- ◆ white

Applications:

- ◆ Entertainment lighting
- ◆ Landscape lighting
- ◆ Commercial lighting
- ◆ Decorative lighting

Part No.	TX-5260RGBW200C26V10-01	Spec No.	WKF-DB0008	Page	1 of 8
----------	-------------------------	----------	------------	------	--------

Package Dimensions:

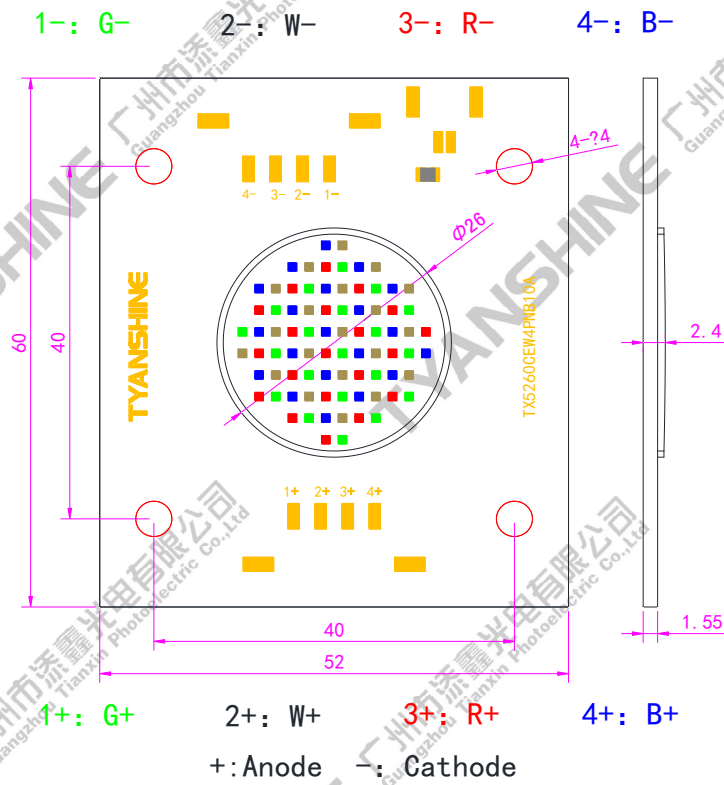

Notes:

1. All dimensions are in millimeters .
2. Tolerances unless otherwise mentioned are ± 0.25 mm .

Part No.	TX-5260RGBW200C26V10-01	Spec No.	WKF-DB0008	Page	2 of 8
----------	-------------------------	----------	------------	------	--------

Absolute Maximum Ratings (Tc=25°C)

Parameter	Symbol	Ratings	Unit	
Forward Current	IF	1.7	A	
Reverse Voltage	VR	Not designed for reverse operation	V	
Power Dissipation	PD	R	40800	mW
		G	57800	
		B	57800	
		W	57800	
Junction Temperature	Tj	R	115	°C
		G	135	
		B	135	
		W	135	
Electrostatic Discharge Threshold (ESD)	ESD	2000	V	
Storage Temperature	Tstg	-30~+70	°C	
Operation Temperature	Topr	-30~+100		

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Emitting Color	Min.	Typ.	Max.	Units
Luminous Flux	Φ_v	If=1.6A	R	1900	2200	—	lm
			G	3400	3700	—	
			B	750	900	—	
			W	3000	3300	—	
Dominant Wavelength	λ_d		R	618	625	628	nm
			G	520	525	530	
			B	450	455	460	
Correlated Colour Temperature	CCT		W	6500	7000	7600	K
Peak-emission Wavelength	λ_p		R	630	635	638	nm
			G	515	520	525	
			B	445	450	455	
Spectral Line Half-Width	$\Delta\lambda$		R	15	17.5	20	nm
		G	30	35	40		
		B	20	23	26		
		W	24	27	30		
Forward Voltage	V_f	R	21	24	27	V	
		G	28	31	34		
		B	28	31	34		
		W	28	31	34		
Viewing Angle at 50% IV	$2\theta_{1/2}$	—	—	115	—	Deg	
Thermal Resistance Junction to Case	$R_{\theta J-C}$	—	R	—	0.08	—	K/W
		—	G	—	0.07	—	
		—	B	—	0.07	—	
		—	W	—	0.07	—	


Notes:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- Luminous flux measurement tolerance: $\pm 15\%$.
- Forward voltage measurement tolerance: $\pm 0.15V$.


Typical Electrical/Optical Characteristics Curves



(25°C Ambient Temperature Unless Otherwise Noted)

Forward Voltage VS. Forward Current


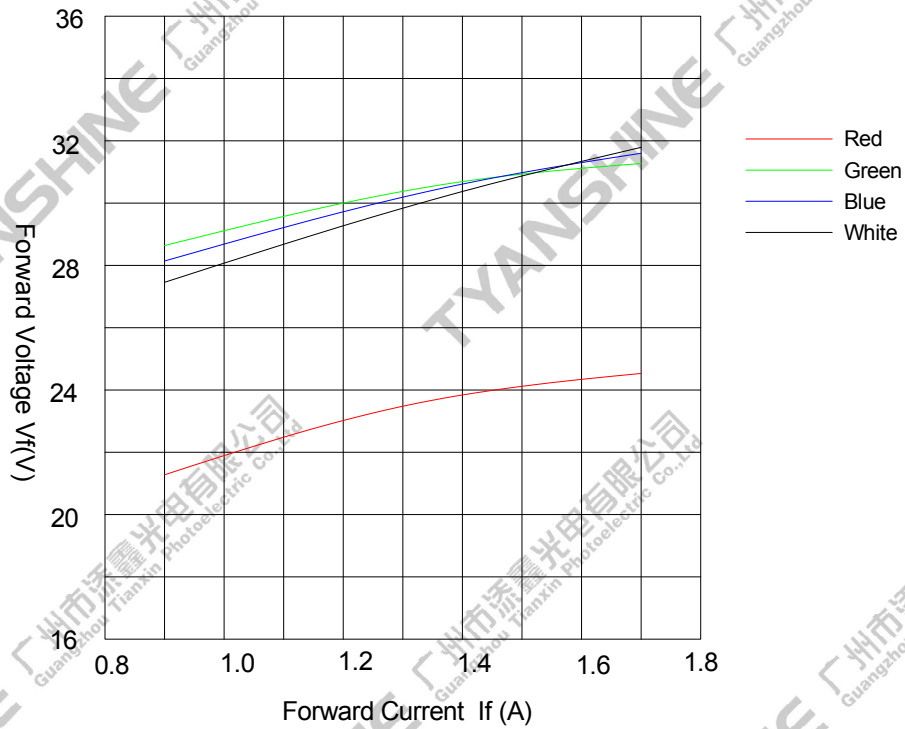


Forward Current VS. Luminous flux

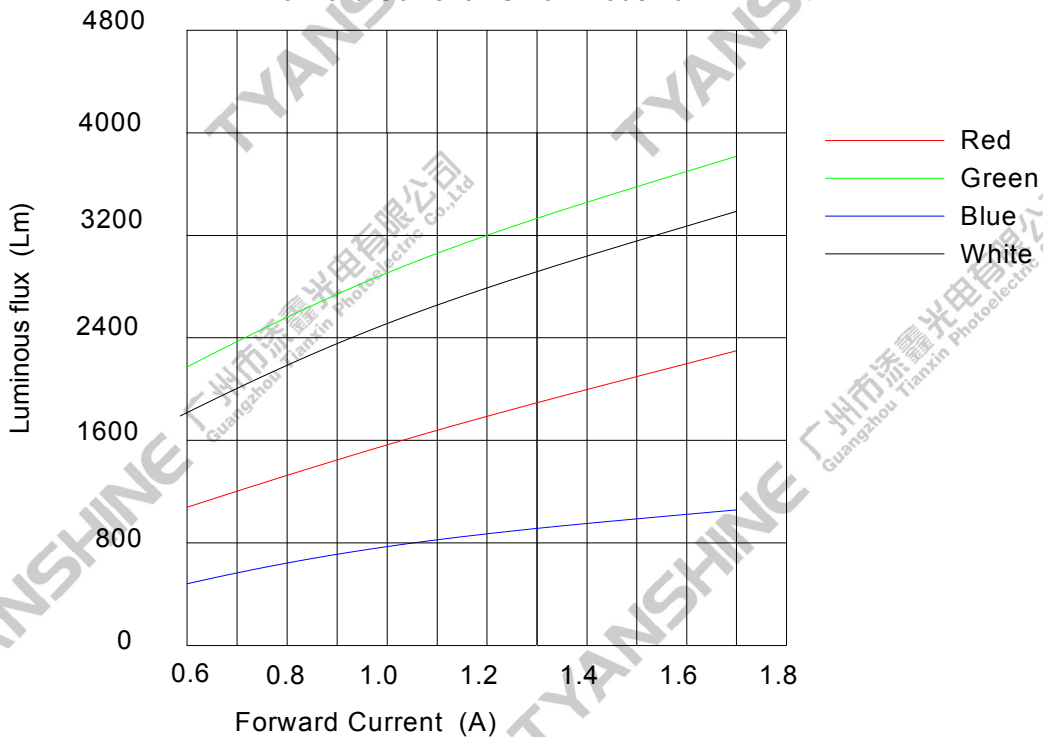

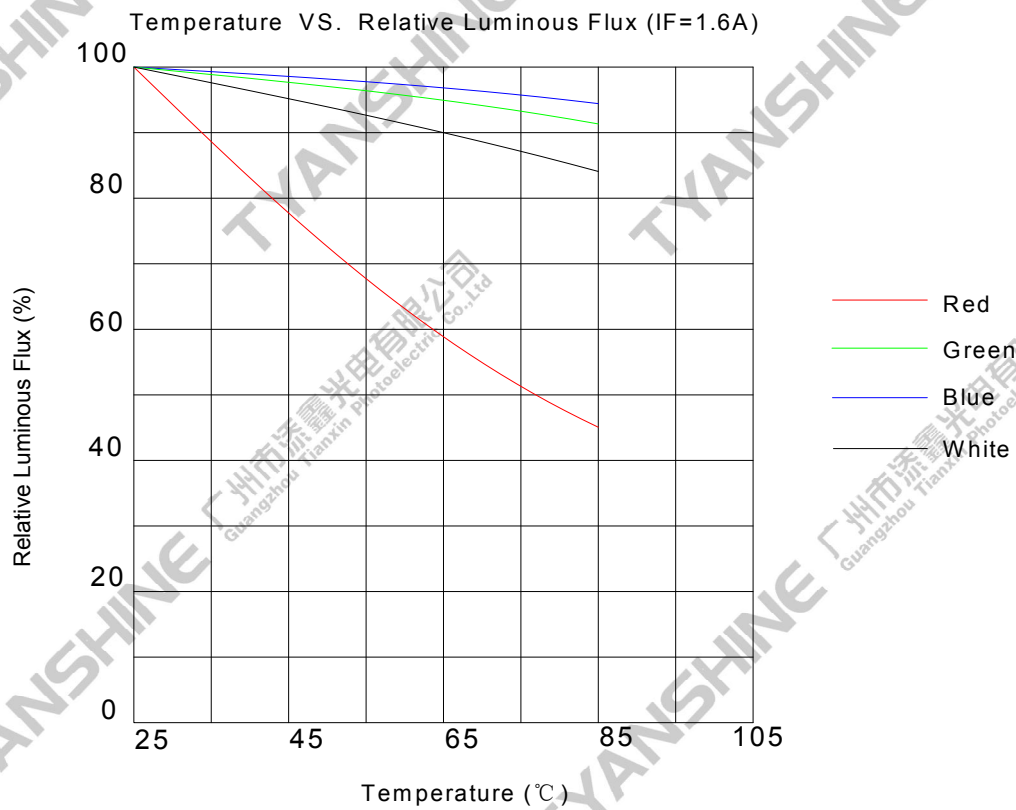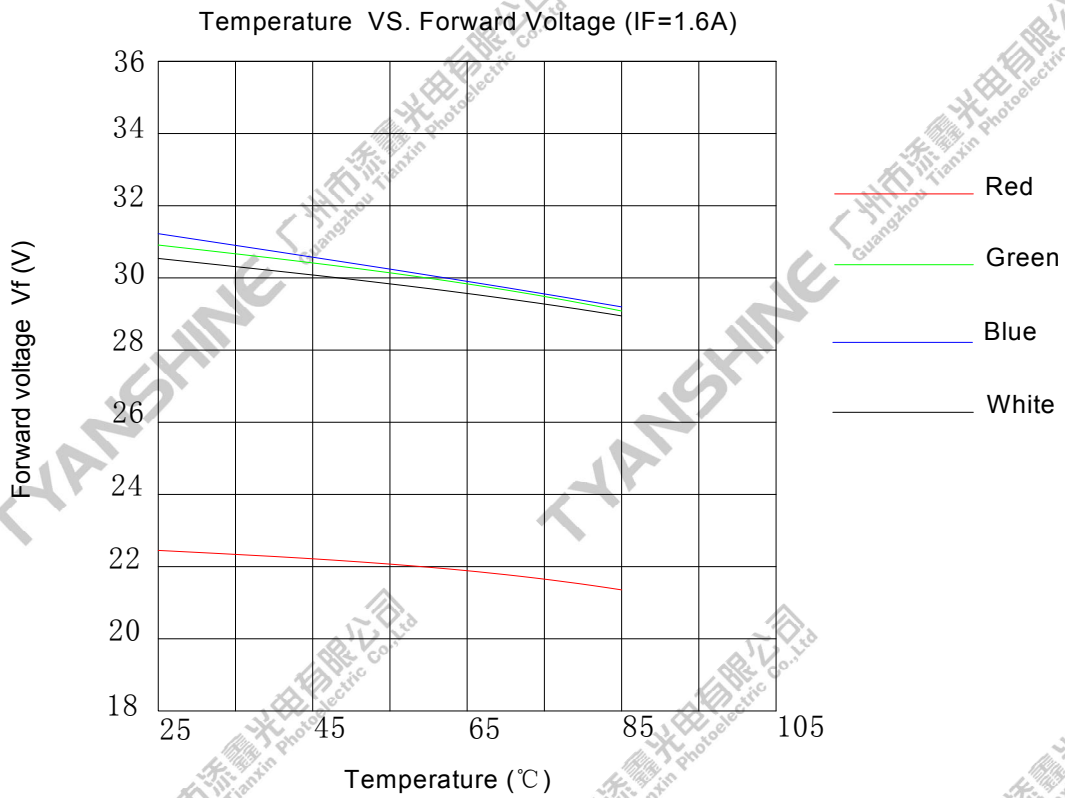

Relative Spectral Distribution

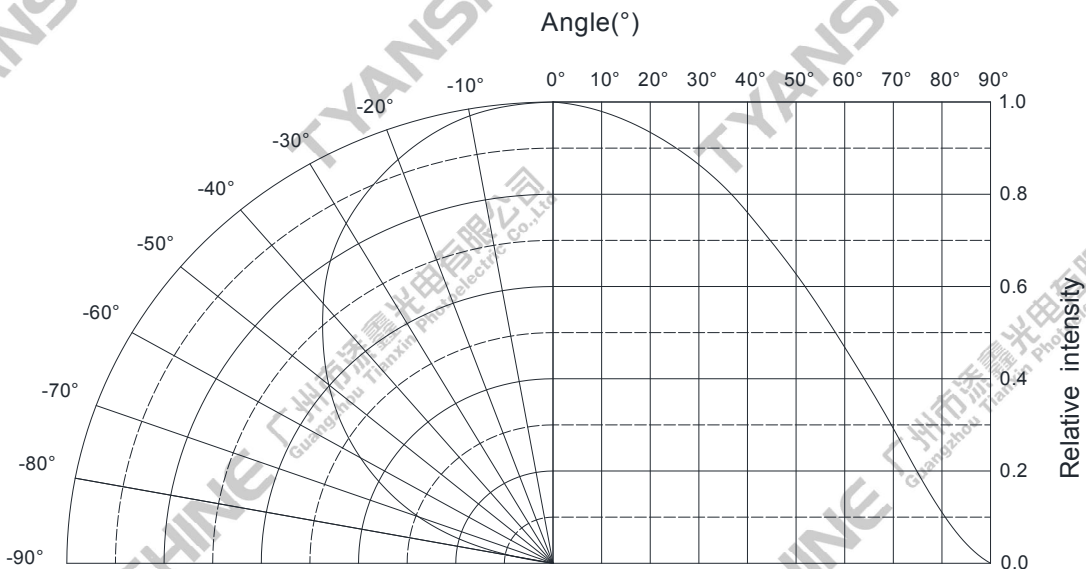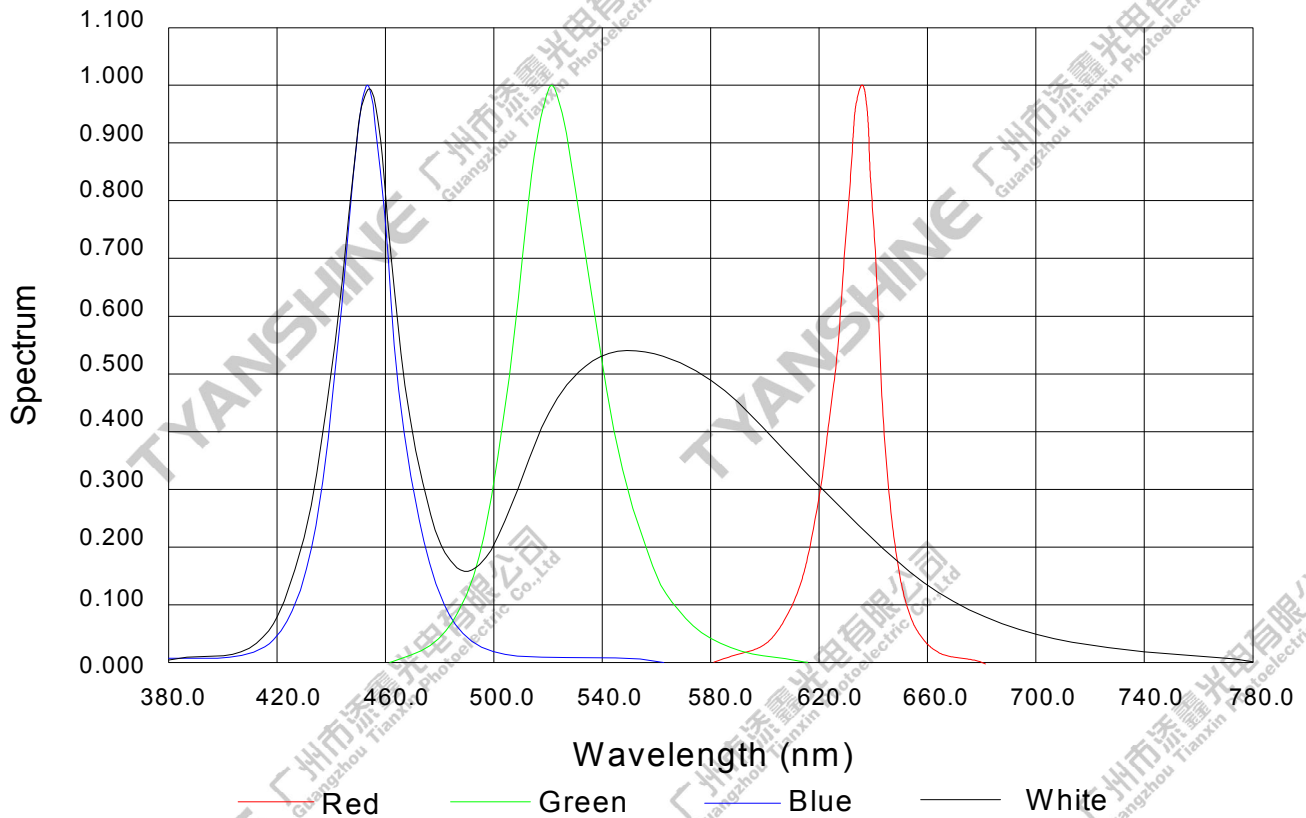


Notes:

1. 2θ_{1/2} is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.

Part No.	TX-5260RGBW200C26V10-01	Spec No.	WKF-DB0008	Page	7 of 8
----------	-------------------------	----------	------------	------	--------

Dimensions For Cannulation And Packaging

Quantity: 6PCS

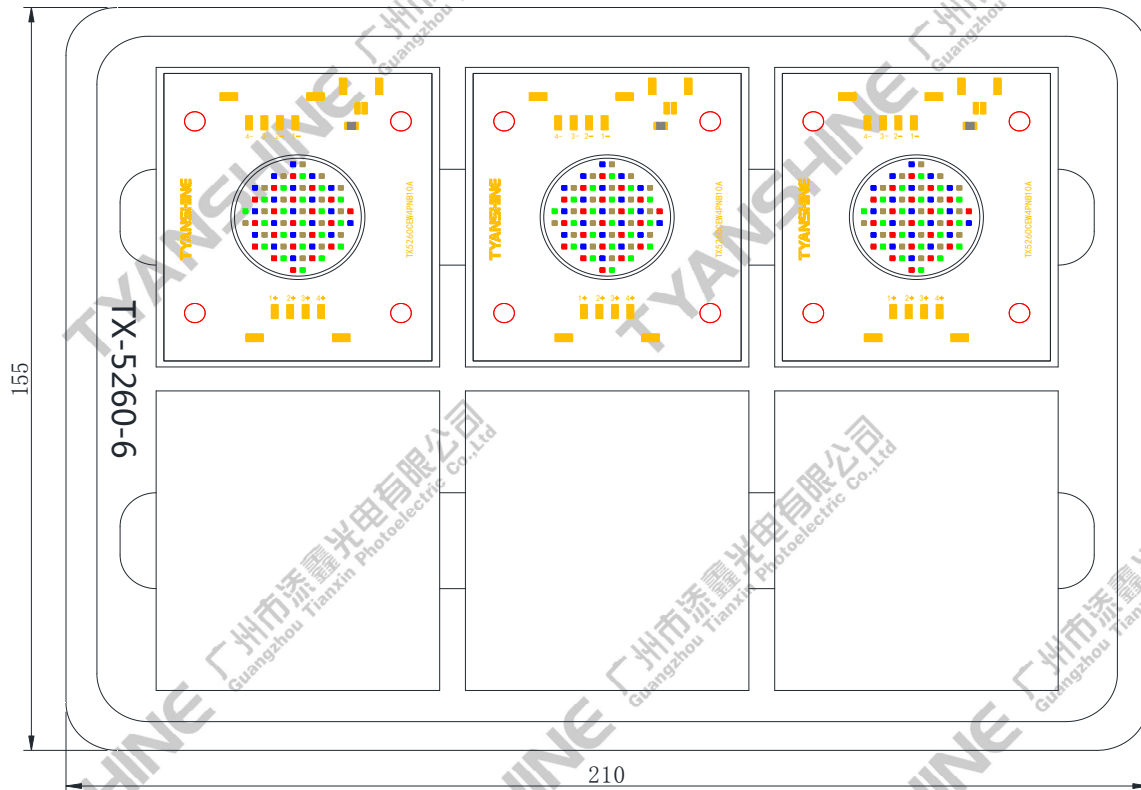

Notes:

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of Irresponsible of the Company.

Part No.	TX-5260RGBW200C26V10-01	Spec No.	WKF-DB0008	Page	8 of 8
----------	-------------------------	----------	------------	------	--------